

GULLIVER/N

Automation for industrial sliding gates up to
3000 Kg



For industrial usage



Available with single-
phase or three-phase
motor 230V



GULLIVER/N



Operator with encoder technology and forced ventilation for intensive use



Easy depth adjustment and compatibility even on old installations with GULLIVER



More speed and more control thanks to the new NET230-EVO-I control board with integrated inverter technology.



Magnetic limit switch



Front control board, with transparent cover and visible display, with stand that can rotate up to 120°.

Metal mechanics and steel and bronze gears for maximum performance and durability

The DE@NET universal control board makes this operator compatible with NETLINK System.



NEW

Compatible with IRONBOX vandal-proof box for installations in challenging or industrial environments



NETCOM

Compatible with NETCOM, the device for installation maintenance and remote control management



NEW
Q3 2023



230V ~ operator with control board, limit switches and encoder



	COD.	Art.					OTHER CHARACTERISTICS
NEW	613601	GULLIVER/N/M	2500 kg	●●●	NET230N	✓	• Self-locking • Magnetic limit switches • Speed adjustment and slow down in opening and closing • Motor control by encoder and obstacle detection

For all models (IB version excluded): control board and fixing plate included


230V ~ three-phase operators with control board, limit switches, encoder, inverter technology



	COD.	Art.					OTHER CHARACTERISTICS
NEW	613612	GULLIVER/N/3P/F/M	3000 kg	●●●	NET230 EVO-I	✓	• Self-locking with magnetic limit switch • Speed adjustment and slow down in opening and closing • Motor control by encoder and obstacle detection • Electromechanical braking device (only for version art. GULLIVER/N/3P/F/M) • Inverter technology
	613611	GULLIVER/N/3P/M	3000 kg	●●●	NET230 EVO-I	✓	• Self-locking • Magnetic limit switches • Speed adjustment and slow down in opening and closing • Motor control by encoder and obstacle detection • Inverter technology

For all models (IB version excluded): control board and fixing plate included

Maximum speed scheme

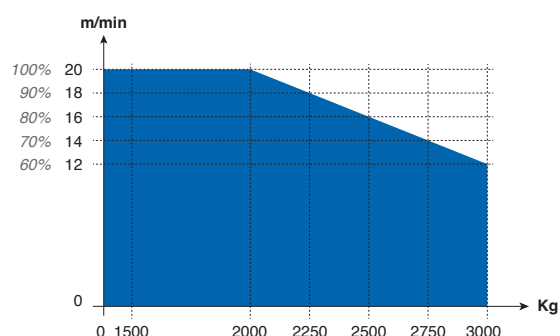


Scan the QR CODE to view all the content we have created on this operator



Technical info


TECHNICAL INFO	GULLIVER/N/M - GULLIVER/N/B	GULLIVER/N/3P/M - GULLIVER/N/3P/F/M - GULLIVER/N/3P/B
Power supply (V)	230-240 V ~ (50/60 Hz)	
Motor power supply voltage (V)	230 V ~	230 V 3~
Nominal Power (W)	226	175
Maximum power (W)	860	1650
Nominal torque (Nm)	2,6	7
Maximum torque (Nm)	47	55
Max Thrust (N)	1300	1530
Duty cycle (cycles/hour) for a 12m leaf length	13	18 (12m/min - 60%) 28 (20m/min - 100%)
Built-in capacitor (μF)	30	-
Motor thermal protection (°C)	140 °C	
Operating temperature range (°C)	-20 ÷ 50 °C	
Opening speed (m/min)	10,4	12 ÷ 20
Standard pinion	Z=18 (m=4mm)	
Weight of product with package (Kg)	30	
Sound pressure emitted (dBA)	< 70	
Protection degree	IP55 (IPX0 for /IB versions)	

Example of a typical installation

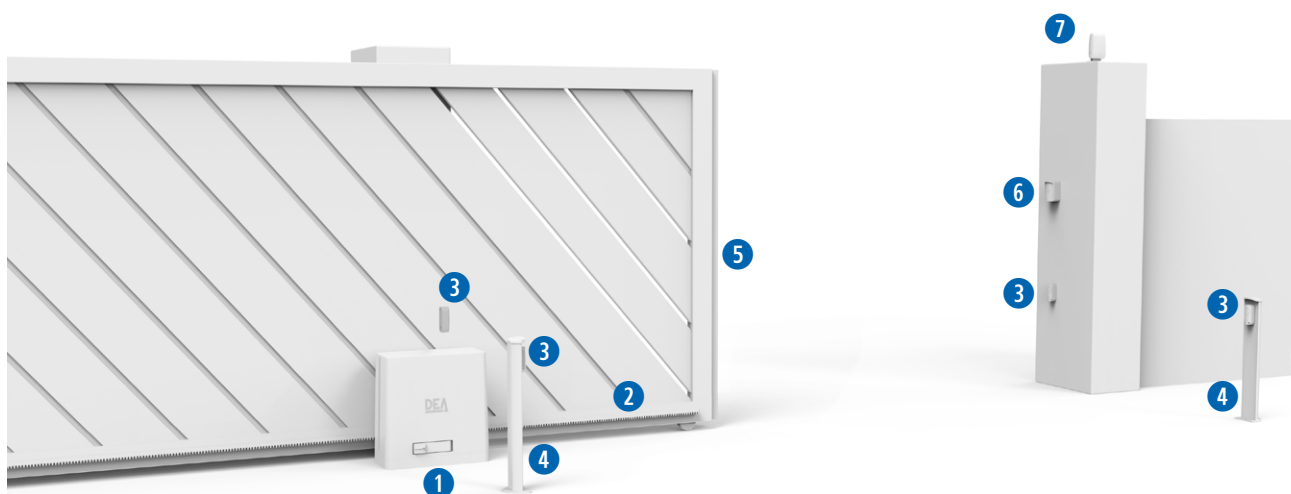

NEW


COD. 613601
Art. GULLIVER/N/M
Operator for industrial
sliding gates

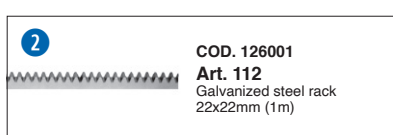


COD. 126001
Art. 112
Galvanized steel rack
22x22mm (1m)



COD. 662044
Art. LINEAR
Pair of adjustable photocells
(180°) with possibility of
synchronized operating. Range
20m

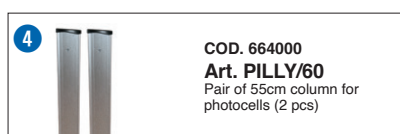


COD. 664000
Art. PILLY/60
Pair of 55cm column for
photocells (2 pcs)

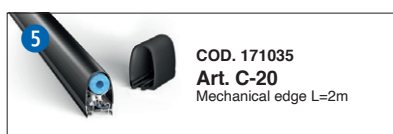


COD. 171035
Art. C-20
Mechanical edge L=2m



COD. 663090
Art. GT-KEY
Metal vandal proof keyswitch
with two contacts, surface
mounted. Supplied with 2 keys.

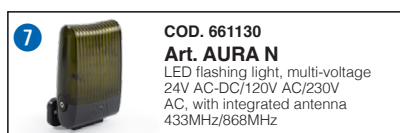

COD. 661130
Art. AURA N
LED flashing light, multi-voltage
24V AC-DC/120V AC/230V
AC, with integrated antenna
433MHz/868MHz







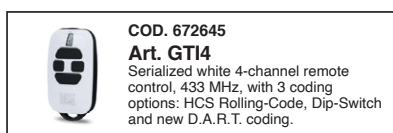


COD. 672645
Art. GTI4
Serialized white 4-channel remote
control, 433 MHz, with 3 coding
options: HCS Rolling-Code, Dip-Switch
and new D.A.R.T. coding.



COD. 668010
Art. 127
Warning sign

SPECIFIC ACCESSORIES

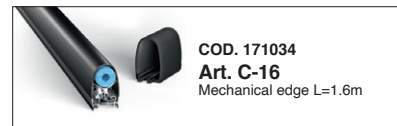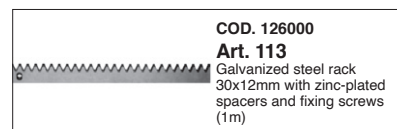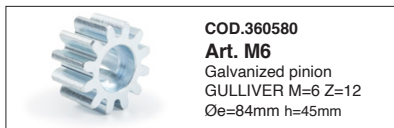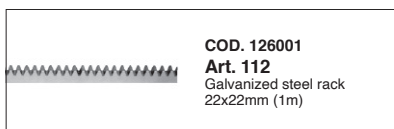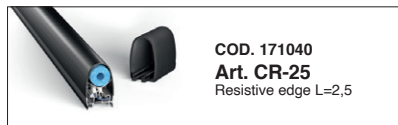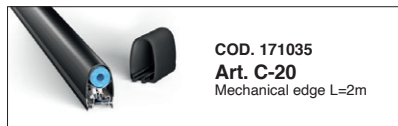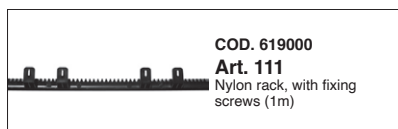

Our range

Automations for sliding gates



LIVI/N



REV




NEW



GULLIVER/N



Automations for sectional doors



SPACE/N



ADVANCE/N



LIVI 902




Automations for swing gates




MAC



STING



LOOK



GEKO



LIVI 502



GHOST 100/200



OLI/N



Automations for industrial gates



LATO



550 PL



Barriers



PASS/N



STOP/N



NEW



TRAFIK/N



Bollards



ROCK



HEADQUARTER
DEA SYSTEM S.p.A.
 Via della Tecnica, 6 - 36013 Piovene Rocchette (VI) - ITALY
 ☎ + 39.0445.55.07.89 - 📠 + 39.0445.55.02.65
 info@deasystem.com - www.deasystem.com

Branches > Italy, France, United Kingdom, Ireland, España, Portugal, Polska, Deutschland, Беларусь

> HEAD OFFICE
DEA System UK & IRE
 Sandholes Road - Cookstown - Co. Tyrone
 BT80 9AR - IRELAND
 ☎ + 44 (0)28 8676 6476 - 📠 + 44 (0)28 8676 2414
 info@deasystem.net

DEA System UK & IRE
 Unit 29-31 - The IO Centre - Hearle Way - Hatfield -
 Hertfordshire AL10 9EW - UNITED KINGDOM
 ☎ + 44 (0)1707 246 599
 contact@deasystem.net